

EP1655



THIS PRINT AND DESIGN IS THE PROPERTY OF ARVA INDUSTRIES IS CONFIDENTIAL AND IS NOT TO BE REPRODUCED WITHOUT OUR PERMISSION AND IS TO BE RETURNED UPON REQUEST

DIMENSIONS ARE IN INCHES

FRACTIONAL ± 1/16
 DECIMAL .XX ± .025
 DECIMAL .XXX ± .010
 ANGLES ± 1/2°

REMOVE ALL BURRS AND SHARP EDGES

Engine: Cummins QSB 3.3, 99 Hp.
 Water cooled, electronic control.
 Transmission: 6 forward speeds, 3 reverse speeds with neutral safety switch.
 Axles: ITL steer drive axles front/rear.
 Internal hydraulically operated wet disk service brakes.
 Spring applied hydraulically released drive line parking brake.
 Suspension: Air bag with ± 3" travel.
 Steering: Selectable 2 wheel, 4 wheel crab, 4 wheel coordinated
 Drive: 4 wheel Full Time up to 18 kph
 Tires: Maxxis, 10.00-15
 Travel Speed: 40 kph. Max. (can be limited)
 Hydraulics: Variable displacement pump, 24 GPM available for optional equipment
 JIC hydraulic hoses and fittings
 Electrical: 12 Volt DC. LED lights, LED headlights
 Cab 1: One person operator compartment (Second person optional)
 Air suspension seat
 Half door
 Sound Protection for Operator (Optional)
 Safety: ROPS Canopy (Custom)
 4 Tank Lubrication Kit

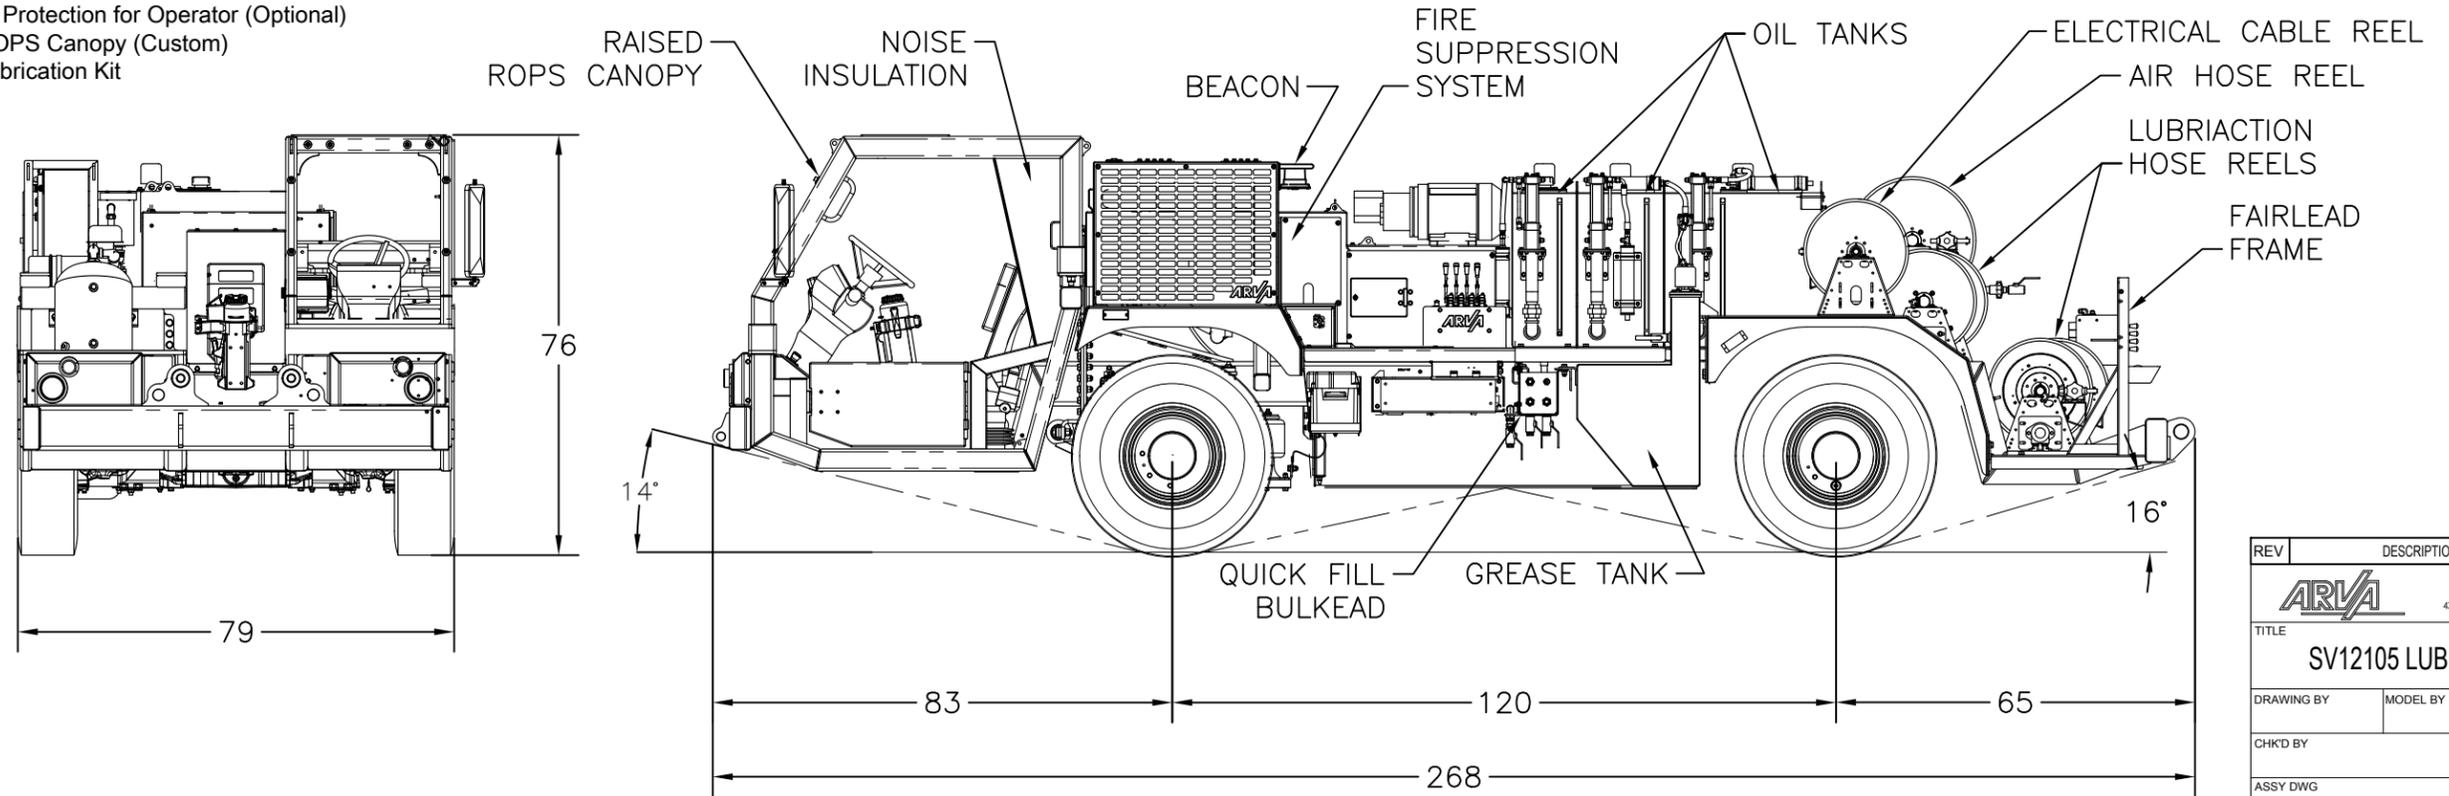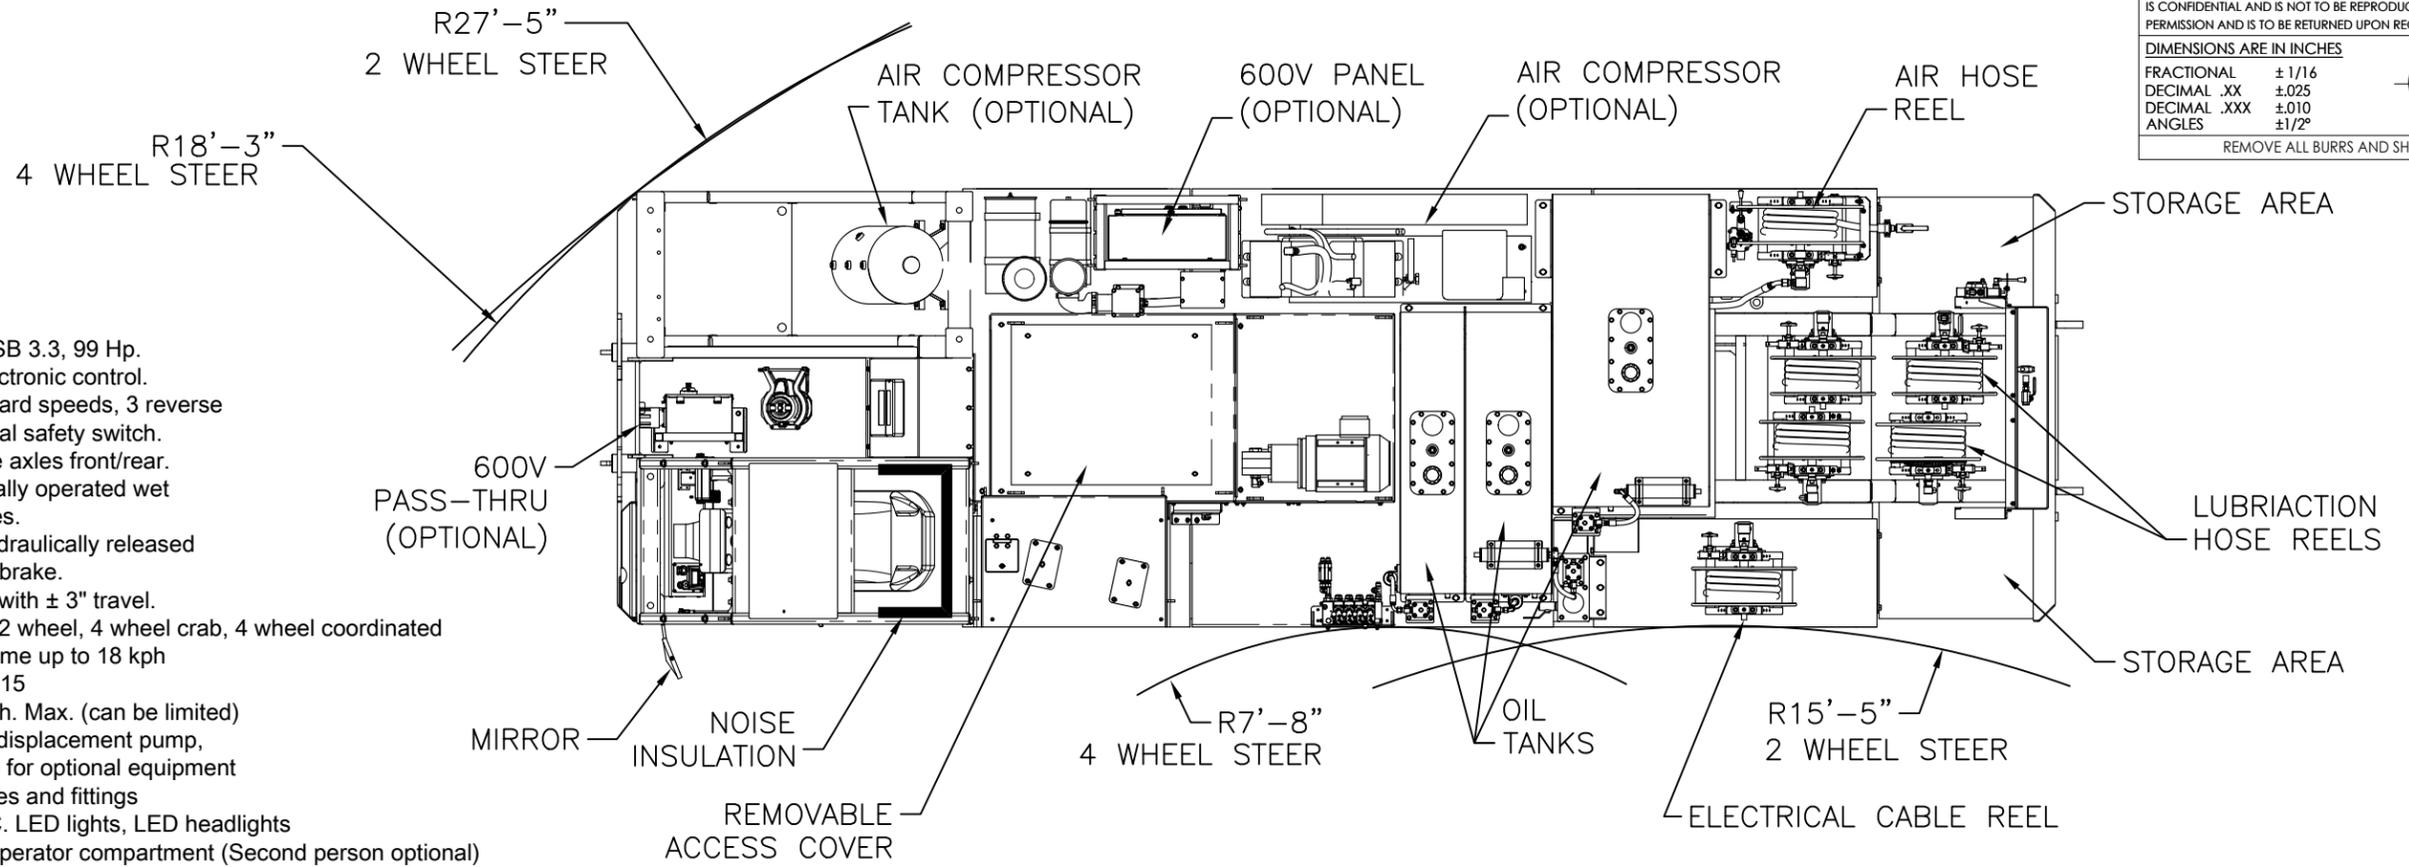

REV	DESCRIPTION	DATE	BY
 ARVA INDUSTRIES INC. 43 GAYLORD ROAD ST THOMAS ONT. CAN. N5P 3R9			
TITLE SV12105 LUBRICATION TRUCK			
DRAWING BY		MODEL BY	DRAWN DATE (yyMMdd):
CHKD BY		LAST SAVED DATE:	
ASSY DWG		WEIGHT (lbs)	
SIMILAR TO		SHEET 1 OF 1	
SCALE	DWG NO	REV	
1:64	EP1660	-	