Engine: Cummins QSB 3.3, 99 Hp.
Water cooled, electronic control.
Transmission: 6 forward speeds, 3 reverse speeds with neutral safety switch. Axles: ITL steer drive axles front/rear.
Internal hydraulically operated wet disk service brakes. Spring applied hydraulically released

drive line parking brake.

Suspension: Air bag with ± 3" travel.

Steering: Selectable 2 wheel, 4 wheel crab, 4 wheel coordinated Drive: 4 wheel up to 20kph, 2 wheel up to max speed

Tires: 10.00-15

Travel Speed: 40 kph. Max. (can be limited)
Hydraulics: Variable displacement pump,
15 GPM available for optional equipment
JIC hydraulic hoses and fittings
Electrical: 12 Volt DC. LED lights, LED headlights


Cab 1: Single or Two operator compartment(s).


Air suspension seat


Half door


Safety: ROPS Canopy on cab
Towing: 7 pin connection for trailer brakes and lights 15000lb payload

2" square receiver for tow connections



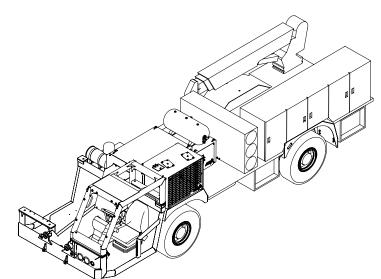

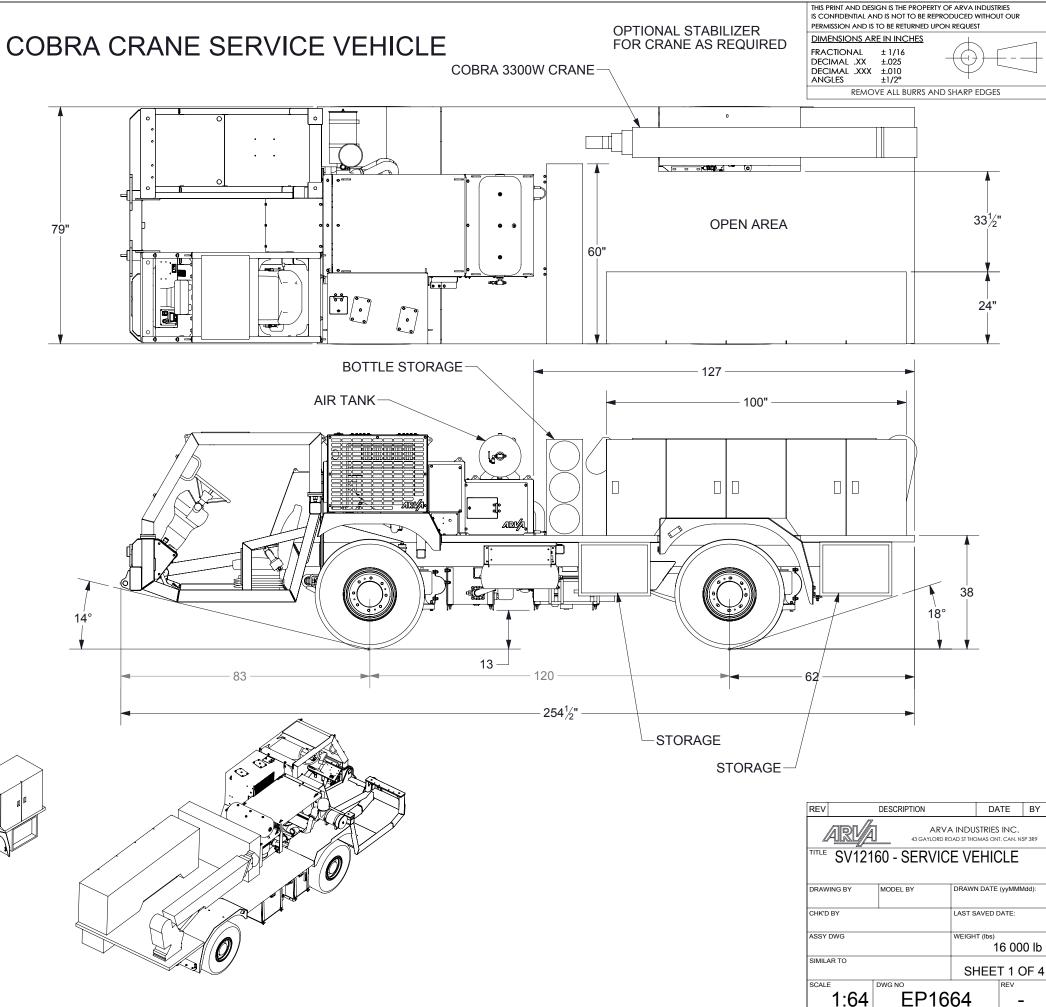

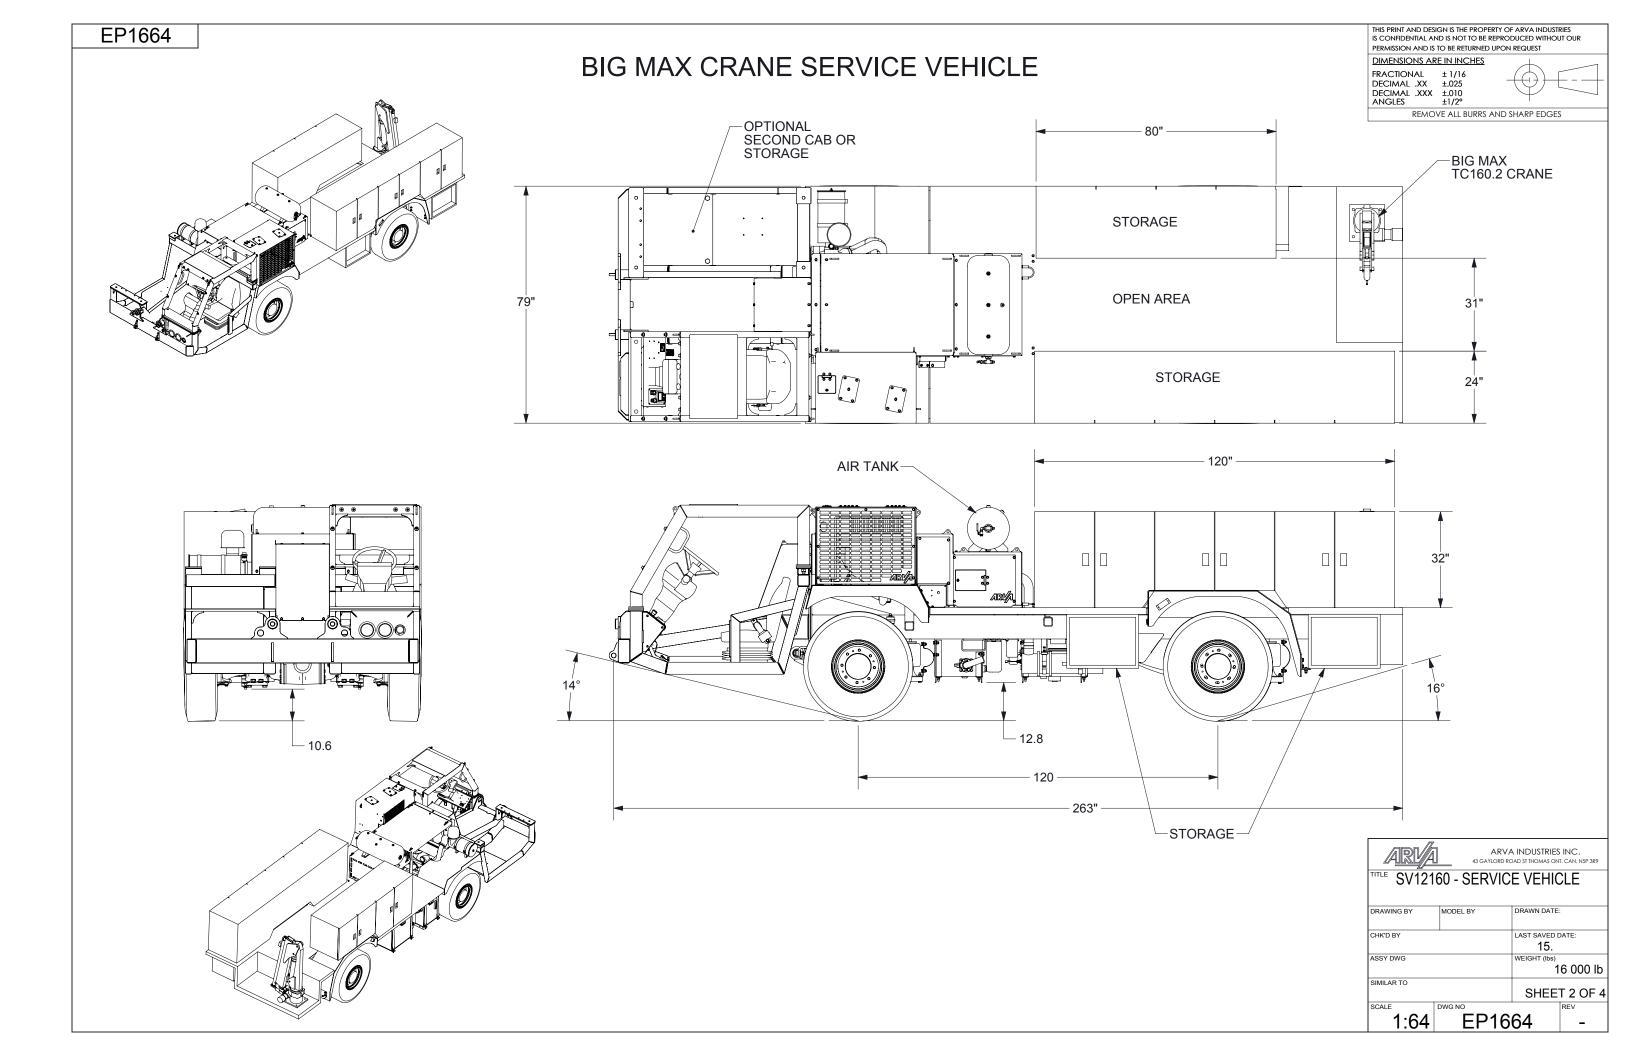

EP1664 REMOVE ALL BURRS AND SHARP EDGES - 2 WHEEL OUTER RADIUS 322

THIS PRINT AND DESIGN IS THE PROPERTY OF ARVA INDUSTRIES IS CONFIDENTIAL AND IS NOT TO BE REPRODUCED WITHOUT OUR PERMISSION AND IS TO BE RETURNED UPON REQUEST

DIMENSIONS ARE IN INCHES

FRACTIONAL ±1/16
DECIMAL .XX ±.025
DECIMAL .XXX ±.010
ANGLES ±1/2°

4 WHEEL OUTER RADIUS 210

✓ 2 WHEEL INNER RADIUS 177

4 WHEEL INNER RADIUS 83



ARVA INDUSTRIES INC.
43 GAYLORD ROAD ST THOMAS ONT. CAN. N5P 3R9 SV12160 - SERVICE VEHICLE DRAWN DATE: DRAWING BY LAST SAVED DATE: WEIGHT (lbs) SHEET 4 OF 4

EP1664

CHK'D BY ASSY DWG

SIMILAR TO

1:64