



EP1646

Engine: Cummins QSB 3.3, 99 Hp. Water cooled, electronic control. Transmission: 6 forward speeds, 3 reverse speeds with neutral safety switch. Axles: Comer steer drive axle Internal hydraulically operated wet disk service brakes. Spring applied hydraulically released wet disk parking brake. Suspension: Air bag with \pm 3" travel. Steering: Selectable 2 wheel, 4 wheel crab, 4 wheel coordinated Drive: 4 wheel Full Time up to 20 kph Travel Speed: 28 kph. Max. (can be limited) Hydraulics: Variable displacement pump, 25 GPM available for optional equipment JIC hydraulic hoses and fittings Electrical: 12 Volt DC. LED lights, LED headlights Cab 1: Single or Two operator compartment(s). Air suspension seat Half door Safety: ROPS Canopy on cab Water: 2000 gallon custom plastic tank

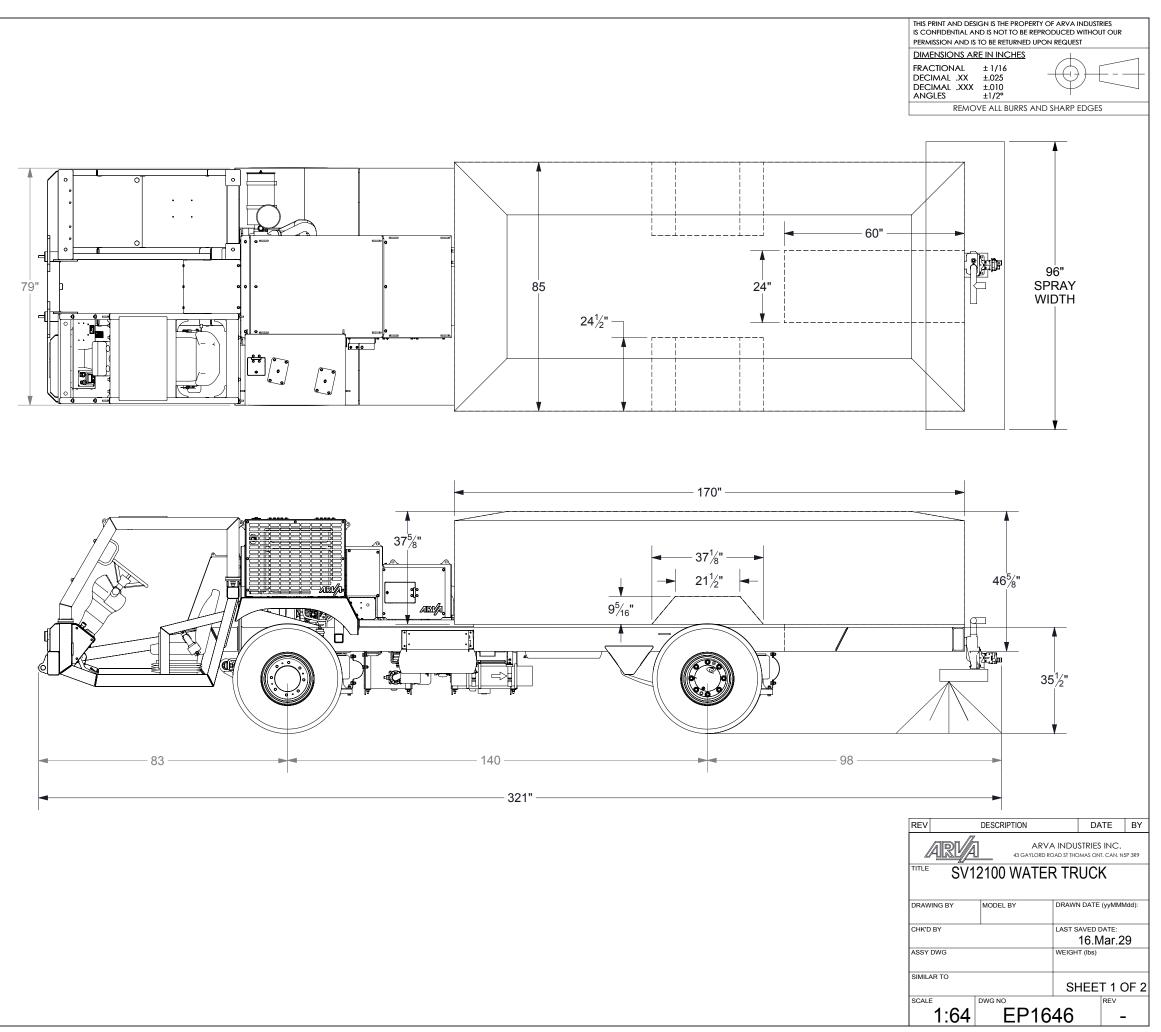

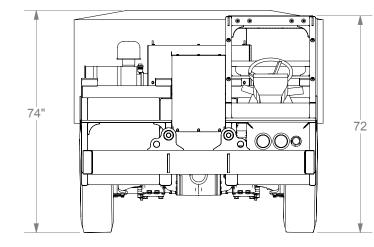

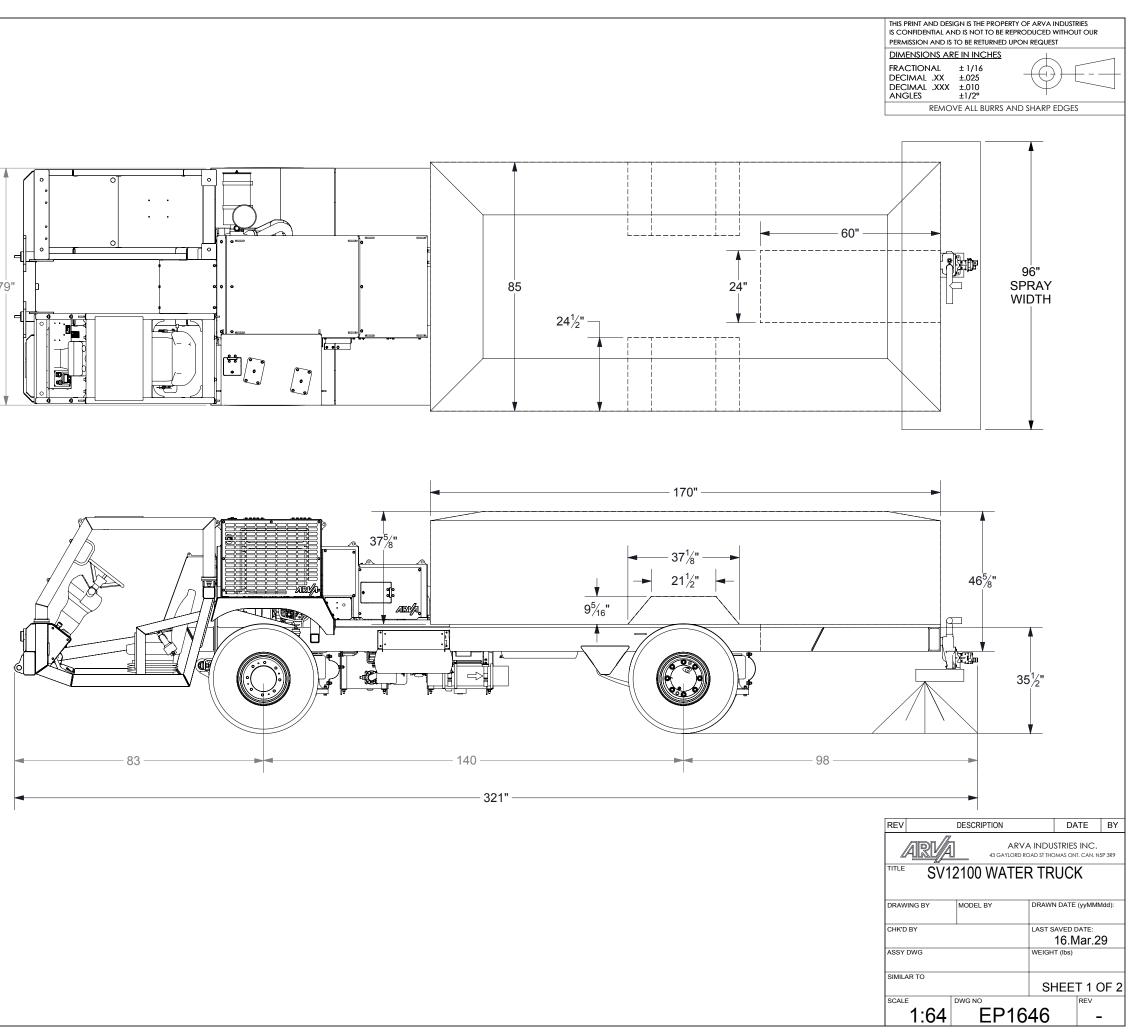

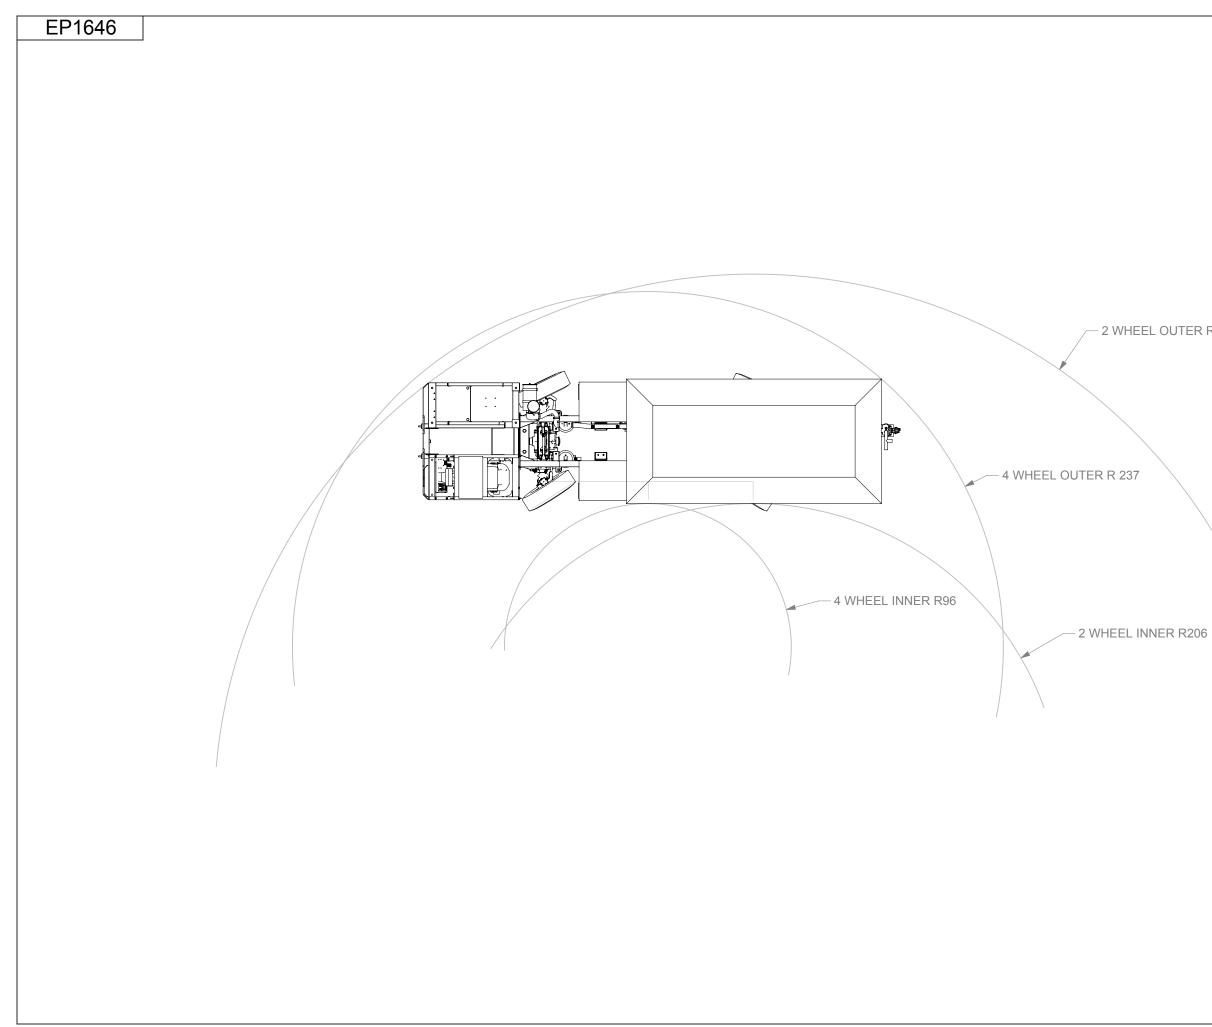

ARVA INDUSTRIES INC. 43 GAYLORD ROAD ST THOMAS ONT. CAN. NSP 3R9 TITLE SV12100 WATER TRUCK				
DRAWING BY	MODEL BY	DRAWN DATE:		
CHK'D BY		LAST SAVED DATE:		
ASSY DWG		WEIGHT (lbs)		
SIMILAR TO		SHEET 2 OF 2		
scale 1:64	EP16	46 ^{REV} -		

- 2 WHEEL OUTER R 359

	THIS PRINT AND DESIGN IS THE PROPERTY OF ARVA INDUSTRIES				
	IS CONFIDENTIAL AND IS NOT TO BE REPRODUCED WITHOUT OUR				
	PERMISSION AND IS TO BE RETURNED UPON REQUEST				
DIMENSIONS ARE IN INCHES					
	FRACTIONAL	± 1/16			
	DECIMAL .XX	±.025		-	
	DECIMAL .XXX	±.010			
	ANGLES	±1/2°	I		
REMOVE ALL BURRS AND SHARP EDGES					