
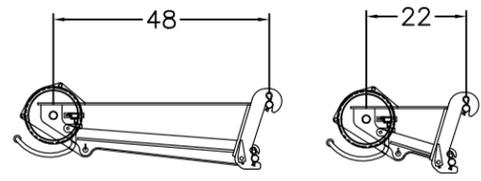
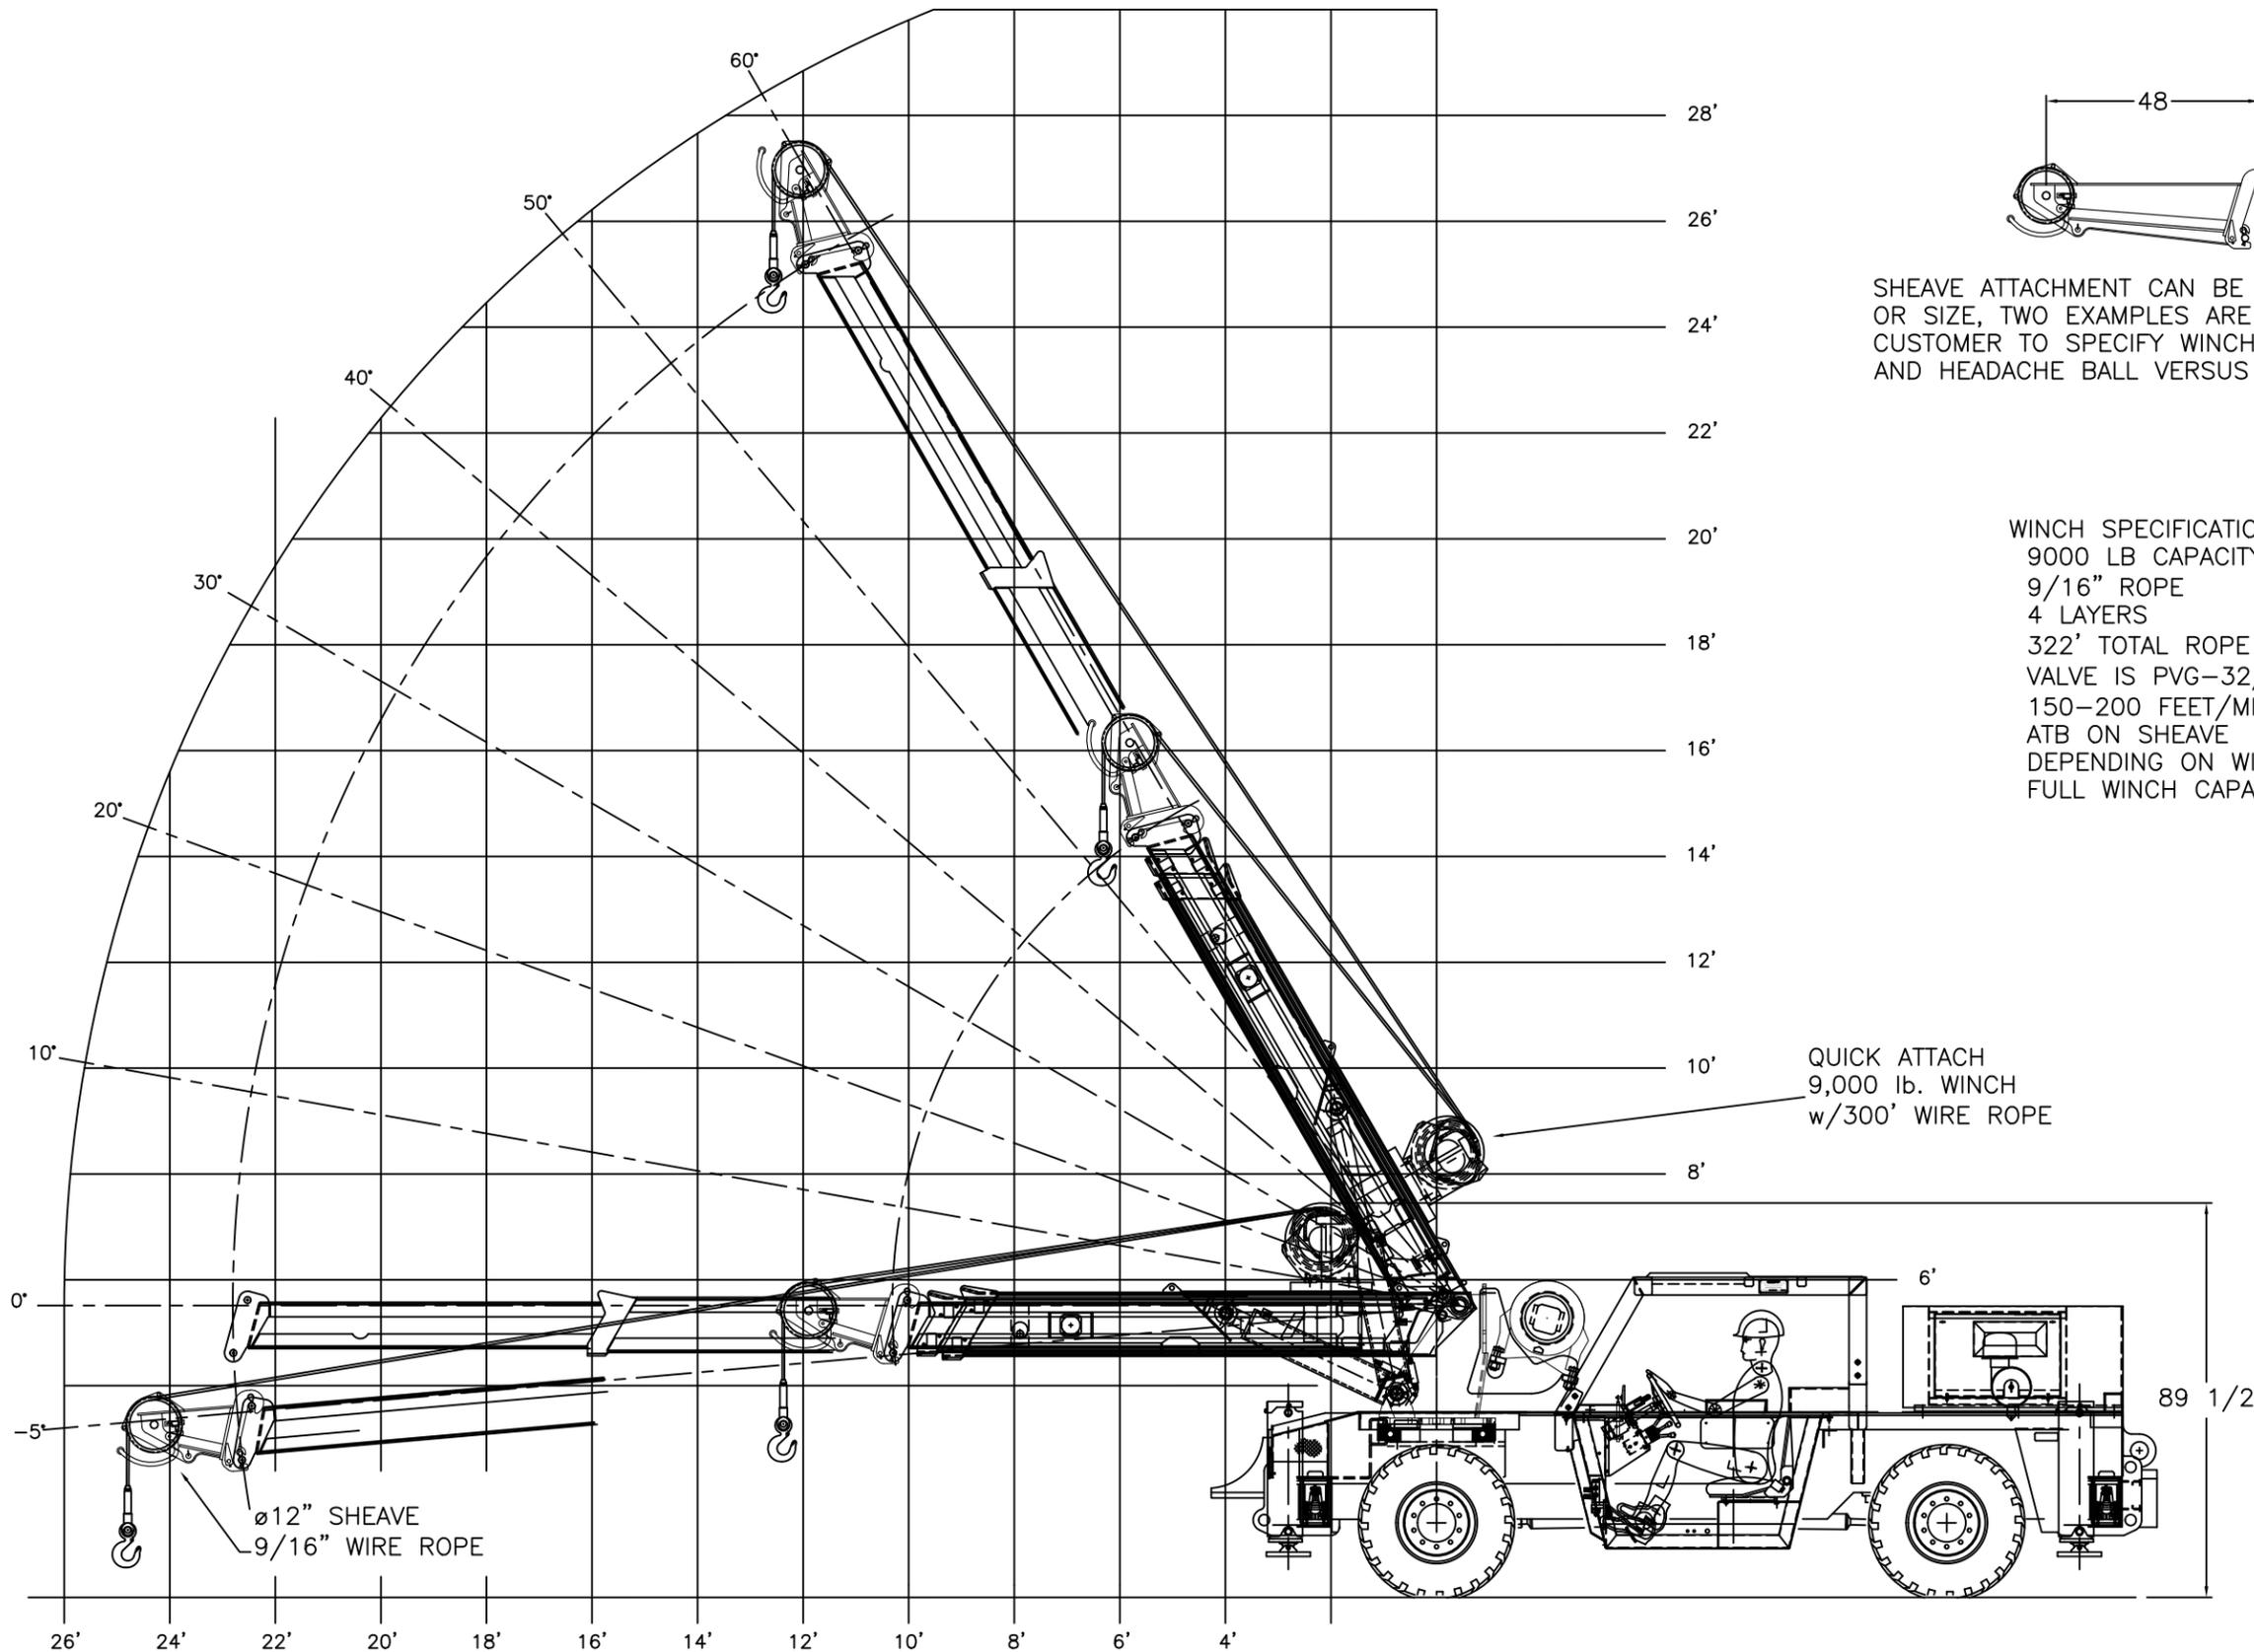


DIMENSIONS ARE IN INCHES	
FRACTIONAL	± 1/16
DECIMAL .XX	± .025
DECIMAL .XXX	± .010
ANGLES	± 1/2°



SHEAVE ATTACHMENT CAN BE DESIGNED IN ALMOST ANY SHAPE OR SIZE, TWO EXAMPLES ARE SHOWN CUSTOMER TO SPECIFY WINCH HOOK CONNECTION; BECKETT AND HEADACHE BALL VERSUS SWAGED END, AS SHOWN

WINCH SPECIFICATIONS:
 9000 LB CAPACITY
 9/16" ROPE
 4 LAYERS
 322' TOTAL ROPE LENGTH
 VALVE IS PVG-32/120 HYBRID
 150-200 FEET/MINUTE DEPENDING ON ROPE LAYER
 ATB ON SHEAVE
 DEPENDING ON WINCH END, CRANE WILL LIKELY HAVE FULL WINCH CAPACITY AT ANY RADIUS

QUICK ATTACH
 9,000 lb. WINCH
 w/300' WIRE ROPE

ø12" SHEAVE
 9/16" WIRE ROPE



~ 24 FOOT BOOM ~

ARVA INDUSTRIES INC. 43 GAYLORD ROAD ST THOMAS ONT. CAN. N5P 3R9	
TITLE MC310 MINING CRANE w/RECOVERY WINCH	
DWN BY	DATE: '13NOV22
CHK'D BY	DATE:
ASSY DWG	WEIGHT
SIMILAR TO EP1616	SHEET 1 OF 2
SCALE 1:45	DWG NO EP1627
	REV C


EP1627

THIS PRINT AND DESIGN IS THE PROPERTY OF ARVA INDUSTRIES
IS CONFIDENTIAL AND IS NOT TO BE REPRODUCED WITHOUT OUR
PERMISSION AND IS TO BE RETURNED UPON REQUEST

DIMENSIONS ARE IN INCHES
FRACTIONAL ± 1/16
DECIMAL .XX ± .025
DECIMAL .XXX ± .010
ANGLES ± 1/2°

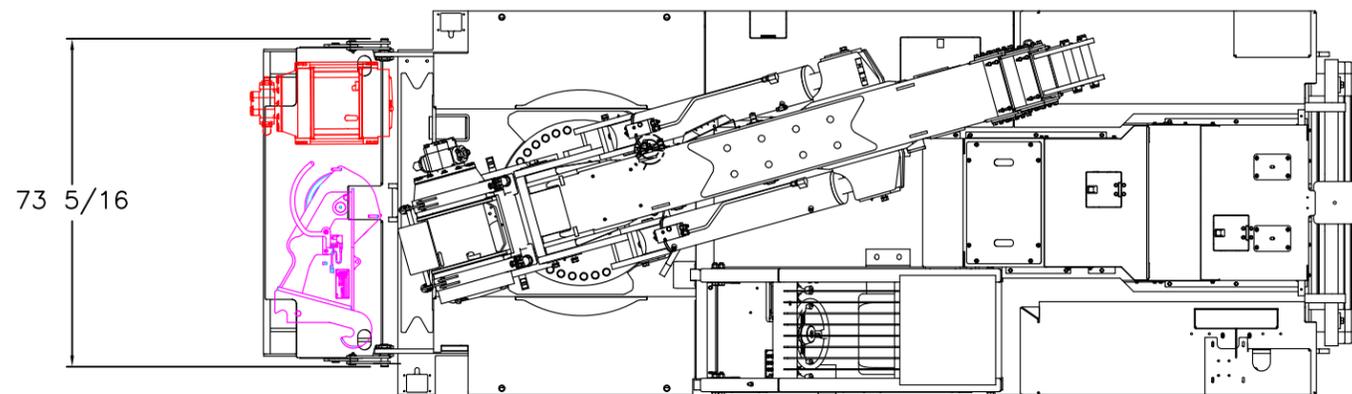

SECONDARY WINCH AND
SHEAVE ATTACHMENT
TRAVEL/STORAGE
LOCATION ON 6600 LB
CAPACITY CARRY DECK

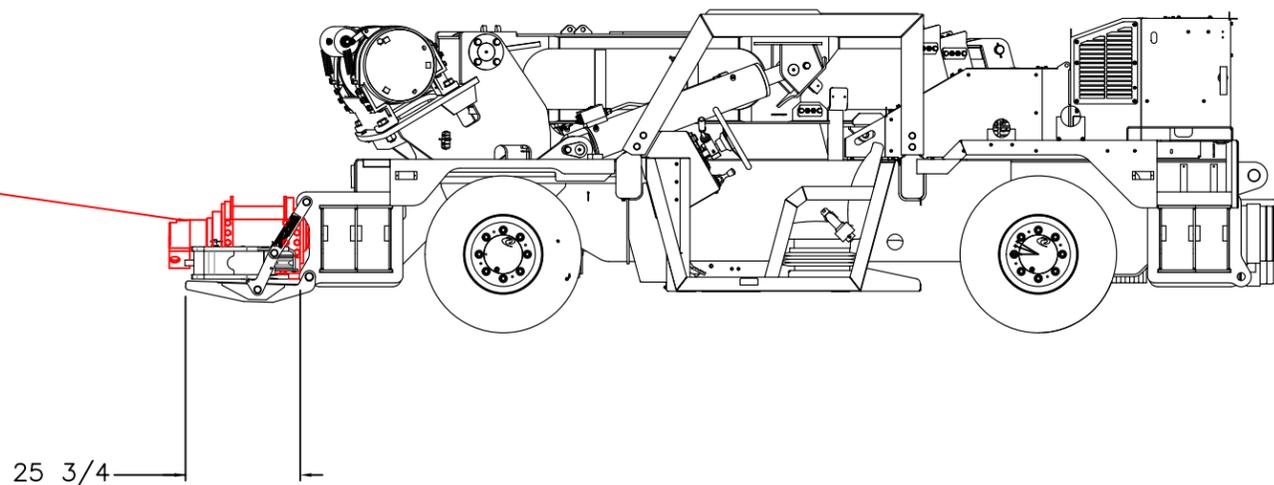

ARVA ARVA INDUSTRIES INC. 43 GAYLORD ROAD ST THOMAS ONT. CAN. N5P 3R9	
TITLE MC310 MINING CRANE w/RECOVERY WINCH	
DWN BY	DATE: '13NOV22
CHK'D BY	DATE:
ASSY DWG	WEIGHT
SIMILAR TO EP1616	SHEET 2 OF 2
SCALE 1:45	DWG NO EP1627
	REV C